

EzRay Air™ Wall

THE SMART ESSENTIALS FOR YOUR CLINIC


Smart angulation for optimal results

Intuitive & convenient operating panel

One dial for all function

2.4kg lightweight tube head for stable and safe use


Compact design for easy use

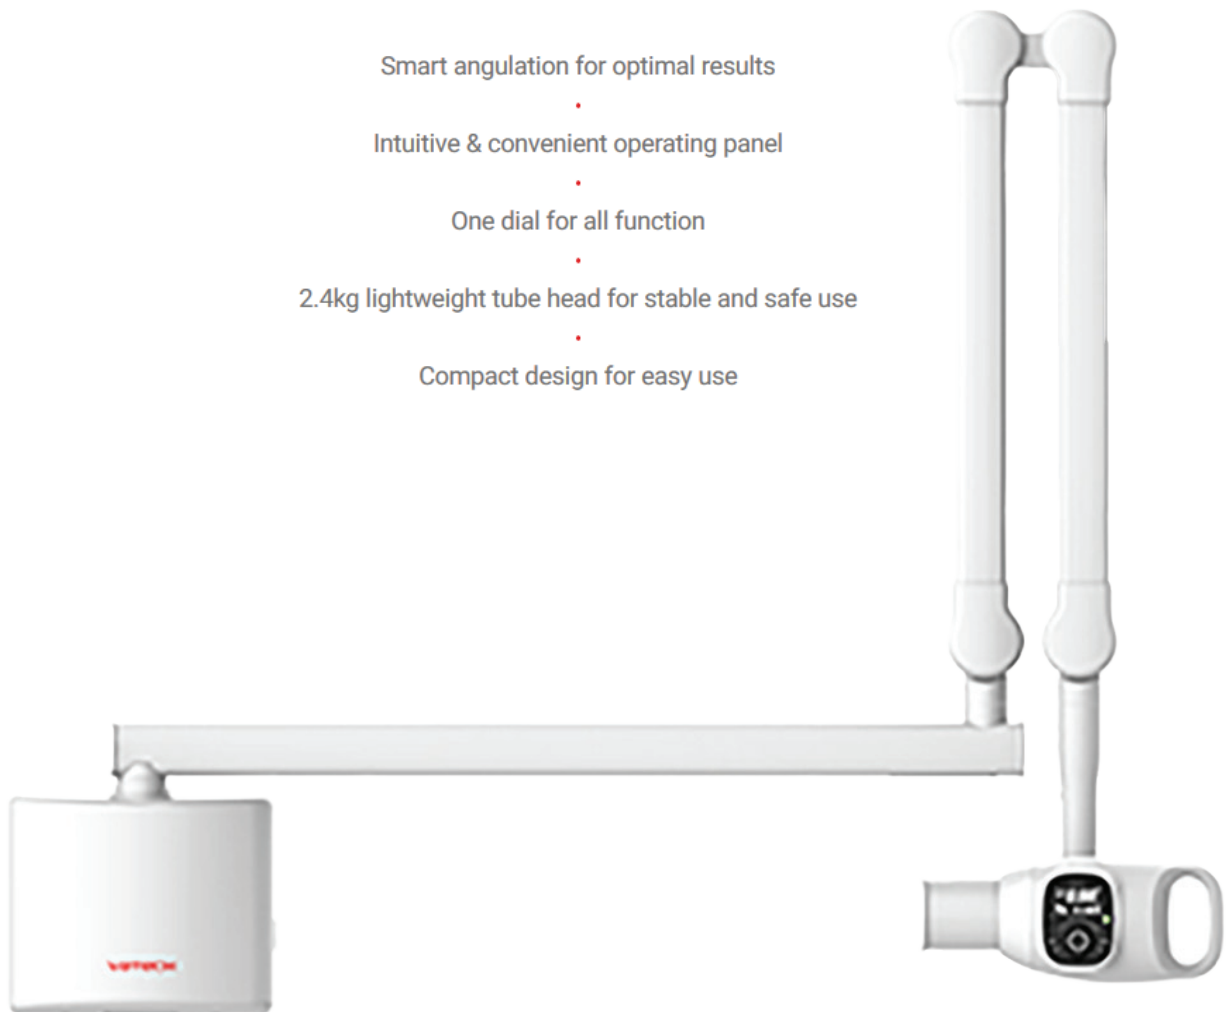

Toll Free: 1800 838 420



ERGONOMIC DESIGN FOR SAFETY AND EFFICIENCY

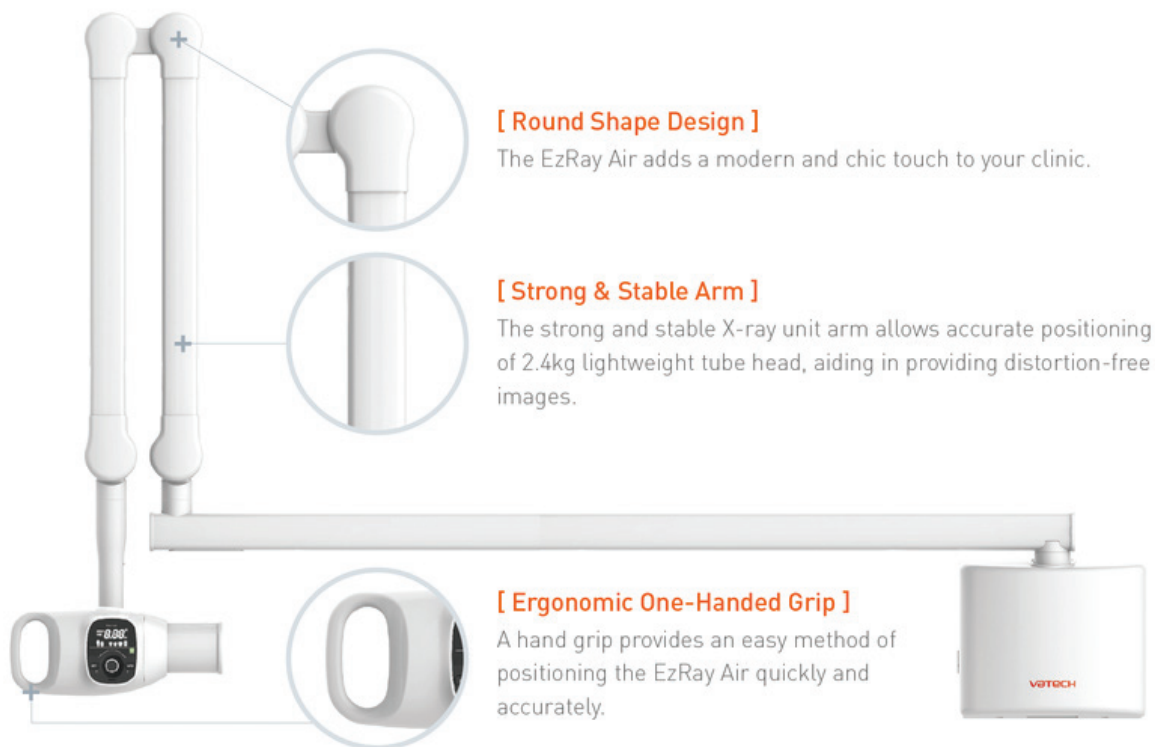

SECURE CLEAR IMAGES WITH A 0.4MM FOCAL SPOT

Regardless of which intraoral sensor you use, the EzRay Air minimizes blur and provides additional diagnostic value with a 0.4mm focal spot.

SPECIFICATIONS

Focal Spot	0.4 mm (IEC 60336)
Tube Voltage (kV)	65 kV
Current (mA)	3.0 mA
Exposure Time Range	0.05 ~ 0.5 (0.01s increment)
Source to Skin Distance	Min. 200 mm
X-ray Field	Default : 60 mm Round, 30x40 mm Rectangular Optional: 20x30 mm Rectangular
Arm Length [Option]	450, 600, 900 mm
Accessories	Remote Exposure Switch (Hand Switch / Doorbell Switch)
Weight	15.9 kg (Arm Length 450 mm) 16.6 kg (Arm Length 600 mm) 17.9 kg (Arm Length 900 mm)

The specifications are subject to change without prior notice.

www.justimaging.com.au